

# RL201 THRU RL207



## 2.0 AMP SILICON RECTIFIERS

### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability

### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.40 grams


### VOLTAGE RANGE

50 to 1000 Volts

### CURRENT

2.0 Amperes

DO-15

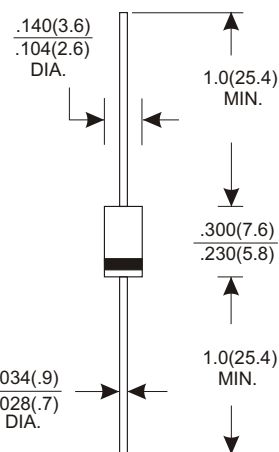

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unieess otherwies specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| TYPE NUMBER   | RL201      | RL202 | RL203 | RL204 | RL205 | RL206 | RL207 | UNITS |
|---|------------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Recurrent Peak Reverse Voltage  | 50         | 100   | 200   | 400   | 600   | 800   | 1000  | V     |
| Maximum RMS Voltage   | 35         | 70    | 140   | 280   | 420   | 560   | 700   | V     |
| Maximum DC Blocking Voltage   | 50         | 100   | 200   | 400   | 600   | 800   | 1000  | V     |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) Lead Length at Ta=75°C                      | 2.0        |       |       |       |       |       |       | A     |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method) | 70         |       |       |       |       |       |       | A     |
| Maximum Instantaneous Forward Voltage at 2.0A   | 1.0        |       |       |       |       |       |       | V     |
| Maximum DC Reverse Current Ta=25°C  | 5.0        |       |       |       |       |       |       | μA    |
| at Rated DC Blocking Voltage Ta=100°C   | 50         |       |       |       |       |       |       | μA    |
| Typical Junction Capacitance (Note 1)   | 20         |       |       |       |       |       |       | pF    |
| Typical Thermal Resistance R JA (Note 2)  | 40         |       |       |       |       |       |       | °C/W  |
| Operating and Storage Temperature Range Tj, Tstg  | -65 — +175 |       |       |       |       |       |       | °C    |

#### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance from Junction to Ambient .375" (9.5mm) lead length.

## RATING AND CHARACTERISTIC CURVES (RL201 THRU RL207)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

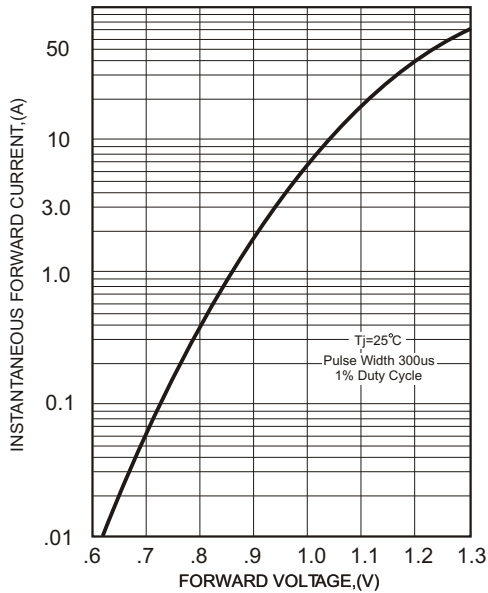


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

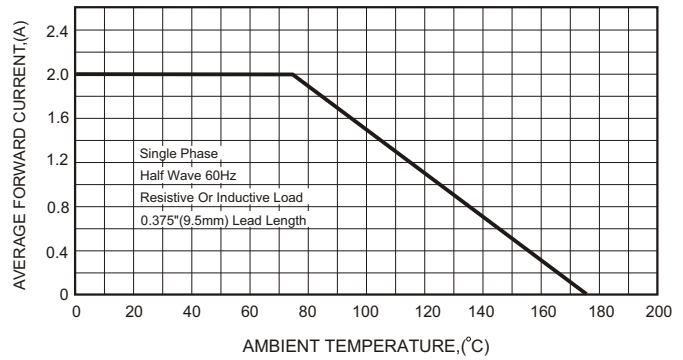


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

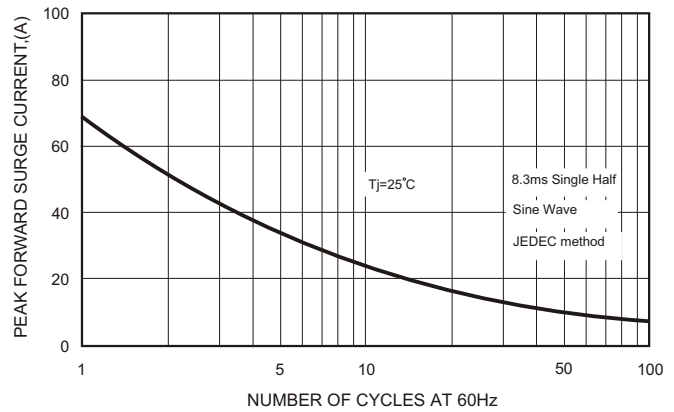


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

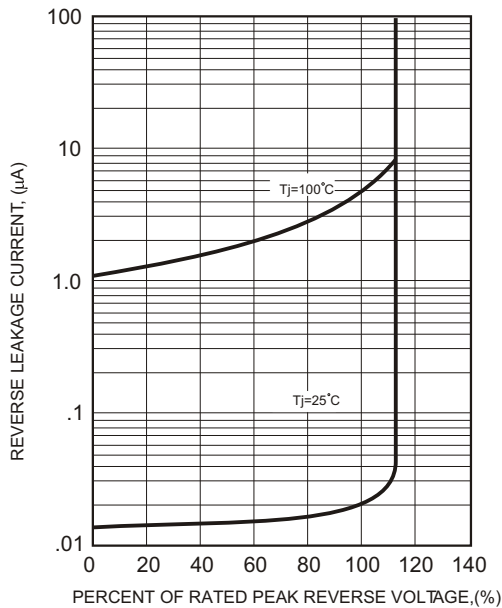


FIG.5-TYPICAL JUNCTION CAPACITANCE

